

S P E C F I L E



Product Number : **PT-TW231R**

Product Name : Short-Throw LCD Projector

Specifications

Main unit

Power supply		100–240 V AC, 50/60 Hz
Power consumption		310 W (0.42 W when STANDBY MODE set to ECO,* ¹ 9.5 W when STANDBY MODE set to NETWORK.)
LCD panel	Panel size	15.0 mm (0.59 inches) diagonal (16:10 aspect ratio)
	Display method	Transparent LCD panel (× 3, R/G/B)
	Pixels	1,024,000 (1,280 × 800) × 3, total of 3,072,000 pixels
	Pixel configuration	Stripe
Lens		Fixed (0.5:1 throw ratio), manual focus, F 1.8, f 6.68 mm
Throw ratio		1.2–1.9:1
Lamp		230 W UHM lamp × 1
Screen size		1.52–2.79 m (60–110 inches) diagonally, 16:10 aspect ratio
Colors		Full color (16,777,216 colors)
Brightness* ²		2,500 lumens (LAMP POWER: NORMAL)
Center-to-corner uniformity* ²		80%
Contrast* ²		500:1 (full on/off, LAMP POWER: NORMAL)
Resolution		1,280 × 800 pixels (Input signals that exceed this resolution will be converted to 1,280 × 800 pixels.)
Scanning frequency	HDMI	f _H : 25 kHz–80 kHz, f _V : 50 Hz–85 Hz, dot clock: 162 MHz or lower
	RGB	f _H : 15 kHz–100 kHz, f _V : 50 Hz–100 Hz, dot clock: 140 MHz or lower (Signals above 140 MHz are downsampled.)
	YPbPr (YCbCr)	525i (480i): f _H 15.75 kHz; f _V 60 Hz, 625i (576i): f _H 15.63 kHz; f _V 50 Hz, 525p (480p): f _H 31.50 kHz; f _V 60 Hz, 625p (576p): f _H 31.25 kHz; f _V 50 Hz, 750 (720)/60p: f _H 45.00 kHz; f _V 60 Hz, 750 (720)/50p: f _H 37.50 kHz; f _V 50 Hz, 1125 (1080)/60i: f _H 33.75 kHz; f _V 60 Hz, 1125 (1080)/50i: f _H 28.13 kHz; f _V 50 Hz
	Video/S-Video	f _H : 15.75 kHz, f _V : 60 Hz [NTSC/NTSC4.43/PAL-M/PAL60] f _H : 15.63 kHz, f _V : 50 Hz [PAL/PAL-N/SECAM]
Optical axis shift		10:–1.44 (fixed)
Keystone correction range		Vertical: ±20°
Installation		Ceiling/desk, front/rear (menu selection)
Built-in speaker	Size	3.7 cm (1-15/32 inches) (round) × 1
	Output power	10 W (monaural)
Terminals	HDMI IN	HDMI 19-pin × 1, HDCP compatible 525p (480p), 625p (576p), 750 (720)/60p, 750 (720)/50p, 1125 (1080)/60i, 1125 (1080)/50i, 1125 (1080)/60p, 1125 (1080)/50p VGA (640 × 480)–WUXGA* ³ (1,920 × 1,200), Audio signal: linear PCM (sampling frequencies: 48 kHz, 44.1 kHz, 32 kHz)
	COMPUTER (RGB) 1 IN R, G, B	D-sub HD 15-pin (female) × 1 G: 0.7 Vp-p (1.0 Vp-p for sync on G), 75 ohms; B, R: 0.7 Vp-p, 75 ohms; HD/VD, SYNC: high impedance, TTL (positive/negative)
	Y, Pb (Cb), Pr (Cr)	Y: 1.0 Vp-p (including sync signal); Pb (Cb), Pr (Cr): 0.7 Vp-p, 75 ohms
	COMPUTER (RGB) 2 IN / 1 OUT R, G, B	D-sub HD 15-pin (female) × 1 (input/output selectable using on-screen menu) G: 0.7 Vp-p (1.0 Vp-p for sync on G), 75 ohms; B, R: 0.7 Vp-p, 75 ohms; HD/VD, SYNC: high impedance, TTL (positive/negative)
	VIDEO IN	RCA pin × 1, 1.0 Vp-p, 75 ohms
	S-VIDEO IN	Mini DIN 4-pin × 1, Y: 1.0 Vp-p; C: 0.286 Vp-p, 75 ohms

COMPUTER AUDIO IN	M3 (L, R) × 1, 0.5 Vrms
VIDEO/S-VIDEO AUDIO IN	RCA × 2 (L/R × 1), 0.5 Vrms
AUDIO OUT	M3 (L, R) × 1 (monitor out: 0–2.0 Vrms, variable)
SERIAL IN	D-sub 9-pin (male) × 1, for external control (RS-232C compliant)
LAN	RJ-45 × 1, for network connection, 100Base-TX/10Base-T, compliant with PLink™
USB	USB × 1, for interactive function
Power cord length	2.0 m (6 ft 7 in)
Cabinet materials	Molded plastic (PC)
Dimensions (W × H × D)	350 mm × 143 mm* ⁴ × 389 mm (13-25/32 × 5-5/8* ⁴ × 15-5/16 inches)
Weight	Approximately 4.7 kg (10.6 lbs)
Operation noise	36 dB (LAMP POWER: NORMAL), 29 dB (LAMP POWER: ECO)
Operating temperature	0–35 °C (32–95 °F) up to 1,200 m (3,937 ft) above sea level, 0–30 °C (32–86 °F) between 1,200 m and 2,700 m (3,937 ft and 8,858 ft) above sea level.
Operating humidity	20%–80% (no condensation)
Remote control unit	
Power supply	3 V DC (R03/LR03/AAA type battery × 2)
Operation range* ⁵	Approximately 7 m (23 ft) when operated from directly in front of the signal receptor
Dimensions (W × H × D)	52 × 110 × 18 mm (2-1/16 × 4-11/32 × 23/32 inches)
Weight	Approx. 67 g (2.4 oz) (including batteries)
Supplied accessories	
	Power cord with security lock (× 1) (× 2 for PT-TW231REA)
	Wireless remote control unit (× 1)
	Batteries for remote control (R03/LR03/AAA type × 6)
	Computer cable (for VGA, 1.8 m / 5 ft 11 in) (× 1)
	Interactive pen (× 1)
	Interactive pointer (× 1)
	USB cable (4.5 m / 14 ft 9 in) (× 1)
	Software CD-ROM (Logo Transfer Software, Multi Projector Monitoring and Control Software) (× 1)
	Software CD-ROM (LightPen II) (× 1)
Optional accessories	
Ceiling mount bracket	ET-PKV100H (for high ceilings) ET-PKV100S (for low ceilings)
Bracket assembly	ET-PKT100B
Replacement lamp unit	ET-LAT100
Replacement filter unit	ET-RFT100
Interactive pen	ET-PEN100
Interactive pointer	ET-PNT100

Weights and dimensions shown are approximate. Specifications subject to change without notice.

*1 When the standby mode is set to eco, network functions such as power on over the LAN network will not operate. Also, only certain commands can be received for external control using the serial terminal.


*2 Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards.

*3 WUXGA resolution is supported only when the signals are compliant with VESA CVT-RB (Coordinated Video Timing-Reduced Blanking).

*4 With legs at shortest position.



*5 Operation range differs depending on environments.

Dimensions

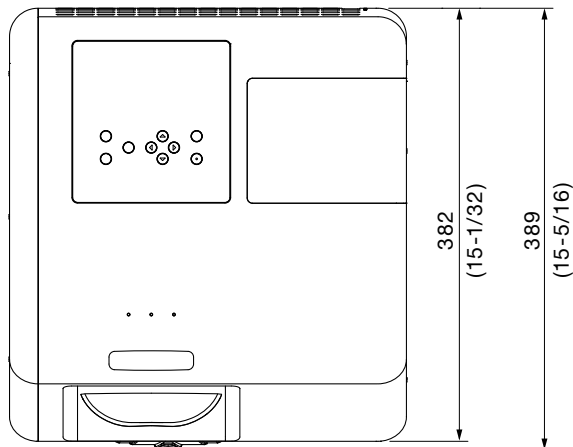


unit : mm (inch)

NOTE: This illustration is not drawn to scale.

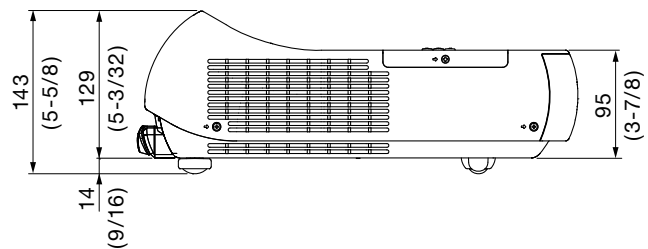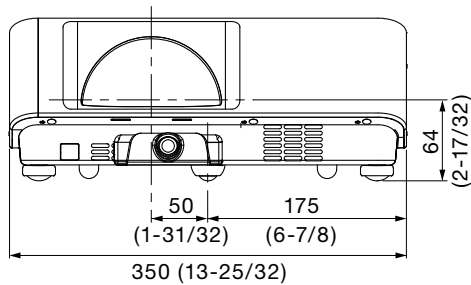


Terminals

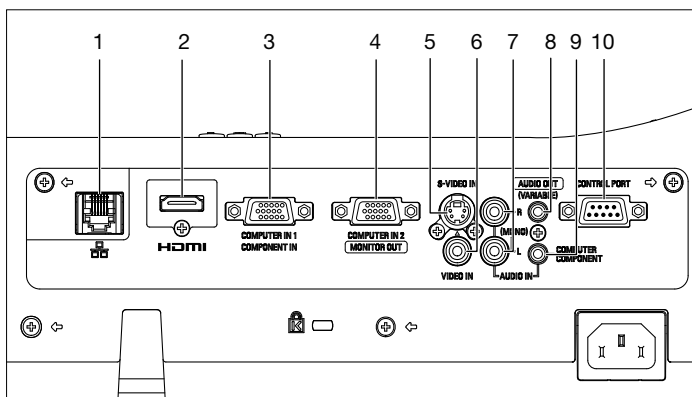

- 1 LAN connector
- 2 HDMI input
- 3 Computer 1 input
- 4 Computer 2 input / computer 1 output
- 5 S-Video input
- 6 Video input
- 7 Audio input for video/S-Video
- 8 Audio output
- 9 Audio input for computer
- 10 Serial input

Standard setting-up position

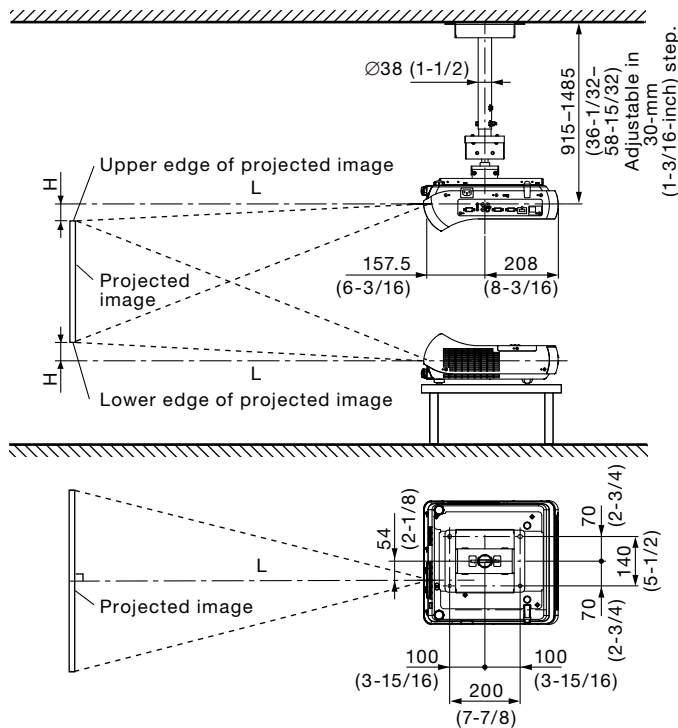

NOTE:

Illustrations show the projector installed using optional ceiling mount bracket ET-PKV100H and bracket assembly ET-PKT100B.

This illustration is not drawn to scale.

L: Distance to screen

H: Height from the edge of screen to center of lensstep.

unit : mm (inch)

Projection distance for 16:10 aspect ratio screen

Unit: meters		
Screen size (inch, diagonal)	Distance to screen (L)	Height from the edge of screen to center of lens (H)
60	0.64	-0.14
70	0.75	-0.16
80	0.86	-0.18
90	0.97	-0.20
100	1.09	-0.23
110	1.20	-0.25

Unit: feet		
Screen size (inch, diagonal)	Distance to screen (L)	Height from the edge of screen to center of lens (H)
60	2.1	-0.5
70	2.5	-0.5
80	2.8	-0.6
90	3.2	-0.7
100	3.6	-0.8
110	3.9	-0.8

Projection distance for 16:9 aspect ratio screen

Unit: meters		
Screen size (inch, diagonal)	Distance to screen (L)	Height from the edge of screen to center of lens (H)
60	0.65	-0.17
70	0.77	-0.20
80	0.89	-0.22
90	1.00	-0.25
100	1.12	-0.28
105	1.17	-0.29

Unit: feet		
Screen size (inch, diagonal)	Distance to screen (L)	Height from the edge of screen to center of lens (H)
60	2.1	-0.6
70	2.5	-0.7
80	2.9	-0.7
90	3.3	-0.8
100	3.7	-0.9
105	3.8	-1.0

Calculation of the projection distance

For a screen size different from the above, use the equation below to calculate the projection distance.

Aspect ratio 16:10

$$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.0112 - 0.0367$$

Aspect ratio 16:9

$$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.0115 - 0.0378$$

NOTE:


Distances calculated with the above equations will include a slight error.

Installable angle


Install the projector at an angle within the range shown below.

• Vertical direction

The projector may be installed at a vertical angle of $\pm 20^\circ$.

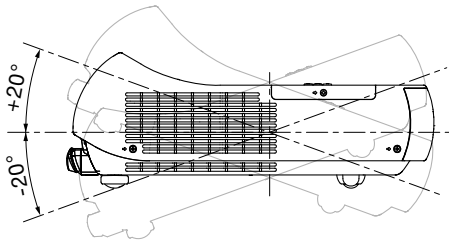**• Horizontal direction**

The projector may be installed at a horizontal angle of $\pm 10^\circ$.

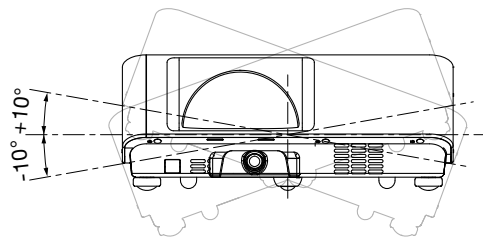

List of compatible signals

The signals that can be input to this projector are shown in the table below. Horizontal scanning frequencies of 25 kHz to 80 kHz (15 kHz to 100 kHz for RGB signals), vertical scanning frequencies of 50 Hz to 120 Hz (50 Hz to 100 Hz for RGB signals), and a dot clock of 162 MHz maximum (140 MHz maximum for RGB signals) can be input.

NOTE: The native resolution of this projector is 1,280 × 800 pixels. If the display resolution of the input signal is different from the native resolution, image compression or expansion will be used to convert the input signal to a level within the native resolution.

Display mode	Display resolution (dots) ¹	Scanning frequency		Dot clock frequency (MHz)	Format
		H (kHz)	V (kHz)		
NTSC/NTSC4.43/PAL-M/PAL60	720 × 480i	15.7	59.9	–	VIDEO/S-VIDEO
PAL/PAL-N/SECAM	720 × 576i	15.6	50.0	–	
525i (480i)	640 × 480i	15.7	59.9	12.3	YPbPr/RGB
625i (576i)	768 × 576i	15.6	50.0	14.8	
525p (480p)	640 × 480	31.5	59.9	25.2	HDMI/YPbPr/RGB
625p (576p)	768 × 575	31.3	50.0	29.5	
720p	1280 × 720	45.0	60.0	74.3	
		37.5	50.0	74.3	
1035i	1920 × 1035i	33.8	60.0	74.3	
1080i	1920 × 1080i	33.8	60.0	74.3	
1080p	1920 × 1080	28.1	50.0	74.3	
		56.3	50.0	148.5	
VGA	640 × 400	67.5	60.0	148.5	HDMI
		31.5	70.1	25.2	
	640 × 480	31.5	59.9	25.2	RGB
		37.5	75.0	31.5	
		37.9	72.8	31.5	HDMI/RGB
		37.9	74.4	31.5	
		43.3	85.0	36.0	RGB
		720 × 400	31.5	70.1	
MAC LC13	640 × 480	35.0	66.6	31.3	
MAC13		35.0	66.7	30.2	
SVGA	800 × 600	32.7	51.1	32.7	
		34.5	55.4	36.4	
		35.2	56.3	36.0	
		37.9	60.3	40.0	
		37.9	61.0	40.0	HDMI/RGB
		38.0	60.5	40.1	
		38.6	60.3	38.6	RGB
		46.9	75.0	49.5	
		48.1	72.2	50.0	
		53.7	85.1	56.3	
MAC16	832 × 624	49.7	74.6	57.3	
XGA	1024 × 768	44.0	54.6	59.1	
		46.9	58.2	63.0	
		47.0	58.3	61.7	
		48.4	60.0	65.0	HDMI/RGB
		48.5	60.0	65.2	
		58.0	72.0	74.7	RGB
		60.0	75.0	78.8	
		60.3	74.9	79.3	
		61.0	75.7	81.0	
		62.0	77.1	84.3	
		63.5	79.4	83.4	
		56.5	70.1	75.0	
		68.7	85.0	94.5	
	1024 × 768i	36.0	87.2	47.3	
		35.5	87.0	44.9	
MAC19	1024 × 768	60.2	75.1	80.0	

*1 The "i" appearing after the resolution indicates an interlaced signal.


Display mode	Display resolution (dots) ¹	Scanning frequency		Dot clock frequency (MHz)	Format
		H (kHz)	V (kHz)		
WXGA	1280 × 768	47.8	59.9	79.5	HDMI/RGB
		56.0	70.0	95.0	RGB
		57.7	72.0	97.8	
	1280 × 800	60.3	74.9	102.3	HDMI/RGB
		68.6	84.8	117.5	
		41.2	50.0	68.6	
		49.6	60.1	79.4	
		49.7	59.8	83.5	
		58.2	70.0	98.9	RGB
		60.0	72.0	102.8	
		62.8	74.9	106.5	
		63.9	60.0	108.0	HDMI/RGB
		71.5	84.8	122.5	RGB
	1360 × 768	47.7	60.0	86.7	
		56.2	72.0	100.1	
	1366 × 768	48.4	60.0	86.7	
	1376 × 768	48.4	60.0	86.7	
MAC21	1152 × 870	68.7	75.1	100.0	
SXGA	1152 × 900	61.2	65.2	92.0	
		71.4	75.6	105.1	
		61.9	66.0	94.5	
	1280 × 960	60.0	60.0	108.0	
	1280 × 1024	31.7	29.8	53.5	HDMI/RGB
		60.3	58.1	93.1	
		62.5	58.6	108.0	RGB
		63.3	60.0	108.2	
		63.7	60.0	109.5	
		63.9	60.0	107.4	
		71.7	67.2	117.0	
		81.1	76.1	135.0	
		64.0	60.0	108.0	HDMI/RGB
		80.0	75.0	135.0	RGB
		63.4	60.0	111.5	
		77.0	72.0	130.1	
		63.8	60.2	108.2	
		91.1	85.0	157.5	
	1280 × 1024i	50.0	86.0	80.0	
		50.0	94.0	80.0	
		46.4	86.7	78.7	
	1280 × 960	75.0	75.1	126.0	
		80.0	75.1	135.2	
SXGA+	1400 × 1050	64.0	60.2	108.0	HDMI/RGB
		65.4	60.1	122.9	
		65.1	59.9	122.4	
WXGA+	1440 × 900	55.9	59.9	106.5	
		74.9	60.0	161.9	RGB
UXGA	1600 × 1200	75.0	60.0	162.0	
		81.3	65.0	175.5	
		87.5	70.0	189.0	
		93.8	75.0	202.5	
WSXGA+	1680 × 1050	65.3	60.0	146.3	HDMI/RGB
WUXGA	1920 × 1200	74.0	59.9	154.0	
		74.6	59.9	193.3	RGB

*1 The "i" appearing after the resolution indicates an interlaced signal.

Serial connector

The serial connector complies with RS-232C. To control the projector from a personal computer, commands must be input through communication software, based on the format and satisfying the communication conditions shown below.

Pin assignments and signal names



No.	Signal name	Description	No.	Signal name	Description
1	–	NC	6	–	NC
2	TXD	Send data	7	–	NC
3	RXD	Receive data	8	–	NC
4	–	NC	9	–	NC
5	GND	Ground			


Communication conditions (factory setting)

Signal level	RS-232C-compliant
Synchronization method	Start-stop synchronization
Baud rate	19,200 bps
Parity	None

Character length	8 bits
Stop bit	1 bit
X parameter	None
S parameter	None


Basic format

Transmission from the computer begins with STX, then command, parameter, and ETX are sent in this order. Add parameters according to the details of control.

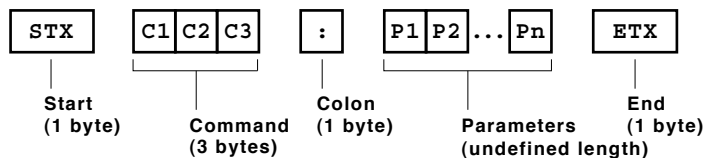

NOTE: When sending commands without parameters, a colon (:) is not necessary.

Basic format with sub-commands

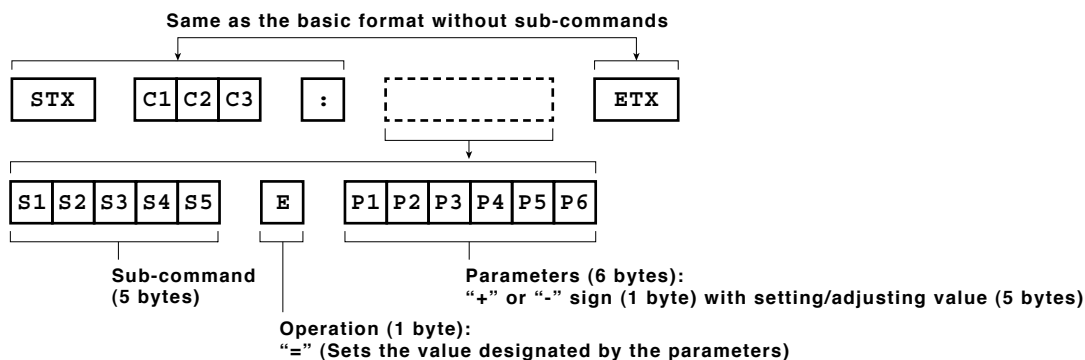


NOTE: When sending sub-commands that require no parameters, operation (E) and parameters are not necessary.

CAUTION

- It may not be possible to send or receive commands for about 10 to 60 seconds when the lamp is first turned on. If this occurs, wait for 60 seconds, then try sending or receiving again.
- When sending multiple commands, be sure to wait for at least 0.5 second after receiving a response from the projector before sending the next command.
- Additional time is sometimes required for response due to processing inside the projector. Set the time-out period for command response to 10 seconds or more.

Cable specifications

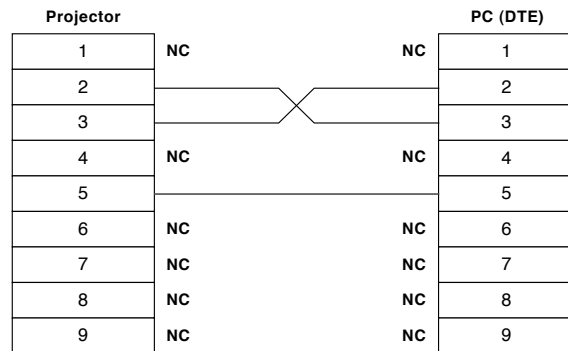

Control commands

Command: <Parameter>	Function	Callback: <Parameter>	Parameter value	
			Min	Max
PON*1/*2	Power on (standby mode on)	PON	–	–
POF*1	Power off (standby mode off)	POF	–	–
AVL:<p1>	Volume control	AVL:<p1>	0	63
IIS:<input signal>	Input signal selection	IIS:<input signal>	–	–
OFZ:<off on>	Freeze	OFZ:<off on>	0	1
VPM:STD	Picture mode: Standard	VPM:STD	–	–
VPM:DYN	Picture mode: Dynamic	VPM:DYN	–	–
VPM:CIN	Picture mode: Cinema	VPM:CIN	–	–
VPM:REA	Picture mode: Real	VPM:REA	–	–
VPM:BBD	Picture mode: Blackboard	VPM:BBD	–	–
VPM:CBD	Picture mode: Colorboard	VPM:CBD	–	–
VPM:IM1	Picture mode: Image 1	VPM:IM1	–	–
VPM:IM2	Picture mode: Image 2	VPM:IM2	–	–
VPM:IM3	Picture mode: Image 3	VPM:IM3	–	–
VPM:IM4	Picture mode: Image 4	VPM:IM4	–	–
AUU	Volume up	AUU	–	–
AUD	Volume down	AUD	–	–
OSH*1	AV mute	OSH	–	–
DZU	Digital zoom: Enlargement	DZU	–	–
DZD	Digital zoom: Reduction	DZD	–	–

*1 Do not send PON, POF, or OSH commands continuously in a short period of time. Doing so may burst the lamp or shorten the lamp replacement cycle.

*2 These commands are effective when the standby mode is set to eco. (Other commands are not effective.)

Status request commands

Command	Description	Callback <Parameter>
QPW	Standby power status	<power condition>
Q\$S	Lamp status	<lamp condition>
QIN	Input signal status	<input signal>
QAV	Volume adjustment value	<p1>
QPM	Picture mode status	Standard
		STD
		Dynamic
		DYN
		Cinema
		CIN
		Real
		REA
	Blackboard	BBD
	Colorboard	CBD
	Image 1	IM1
	Image 2	IM2
	Image 3	IM3
	Image 4	IM4
QFZ	Freeze status	<off on>
Q\$L	Lamp run time	<acctch>
QSH	AV mute function status	<off_on>
QKS	Keystone correction status	<p1>
QTE	Color temperature adjustment status	<color temp>

NOTE: If a wrong command is received, the projector will send an ER401 command to the computer.

Parameter format

Parameter format	Size (Byte)	Definition
<p1>	3 (1 or 2 bytes also possible when under control)	Decimal without signs: 0 to 999 (000, 001, 002...999) Decimal with signs: -99 to +99 (-99...-01, +00, +01, +02...+99) Callback from the projector is 3 Byte.
<off on>	1	0 = off, 1 = on
<input signal>	3	HD1 = HDMI, RG1 = computer 1, RG2 = computer 2, VID = video, SVD = S-Video
<power condition>	3	000 = power off (standby mode off), 001 = power on (standby mode on)
<lamp condition>	1	0 = standby, 1 = lamp on under control, 2 = lamp on, 3 = lamp off under control
<acctch>	4	Decimal without signs: 0000–9999 hours
<color temp>	1	11 = ultra-low, 0 = low, 1 = standart, 2 = high

NOTE: If a wrong command is received, the projector will send an ER401 command to the computer.

Command example

To set the volume to +30, send the command as shown below.



STX	AVL	:	30	ETX
Start	Command		Parameter	End

NOTE: When sending commands without parameters, a colon (:) is not necessary.

Notes on projector placement and operation

The projector uses a high-wattage lamp that becomes very hot during operation. Please observe the following precautions.

1. Never place objects on top of the projector while it is operating.
2. Make sure there is the unobstructed space as shown below or more around the projector's exhaust openings. In addition to this space, also ensure that there is a sufficient work space for removing and installing the lamp, air filter and other parts.
3. Make sure that nothing blocks the projector's air intake and exhaust openings. Also, install the projector so that cool or hot air from other air conditioning equipment does not flow directly toward the projector's air intake or exhaust openings.
4. Do not install the projector in an enclosed space. If it is necessary to install it in an enclosed space, add a separate ventilation system. If ventilation is insufficient, hot air will accumulate at the intake opening. This may cause the projector's protective circuit to interrupt projector operation.

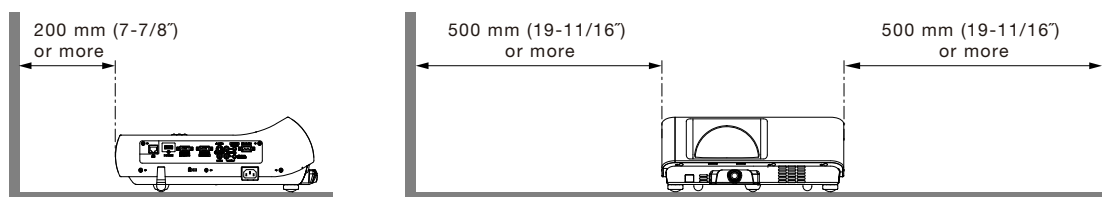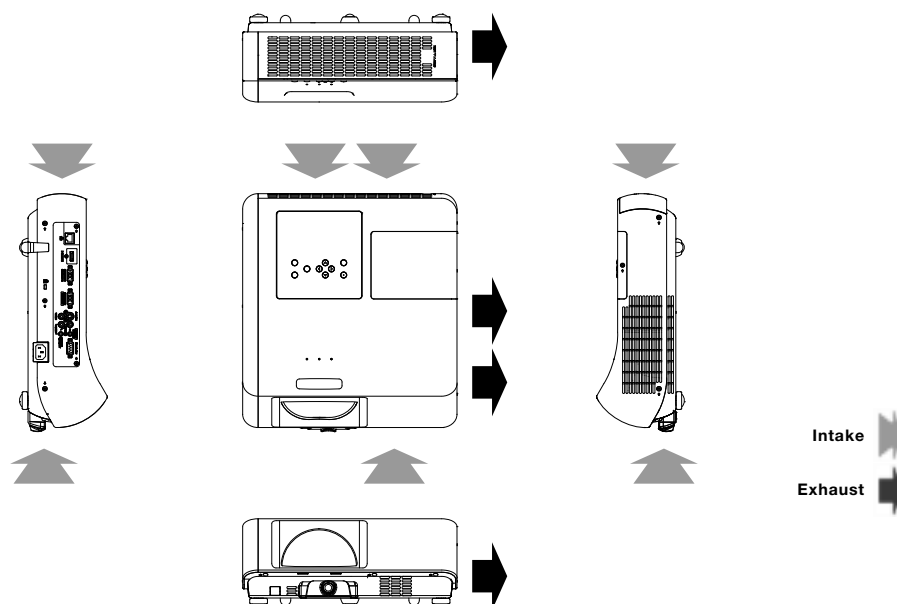**Direction of air intake and exhaust****Operating the projector continuously**

1. If the projector is to be operated continuously 6 hours or more, lamp replacement cycle duration becomes shorter.
2. The lamp replacement cycle duration becomes shorter if the projector is operated repeatedly for short periods (one hour or less).

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations.

PJLink is a registered trademark, or a trademark application has been filed, in Japan, the United States, and other countries and regions. All other trademarks are the property of their respective trademark owners.